

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
23 October 2003 (23.10.2003)


PCT

(10) International Publication Number
WO 03/087663 A1

- (51) International Patent Classification⁷: **F21V 11/16**, 17/04, 13/12 (74) Agent: **DUSSELDORP, Jan, C.**; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (21) International Application Number: **PCT/IB03/01486**
- (22) International Filing Date: **11 April 2003 (11.04.2003)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
02076444.5 **12 April 2002 (12.04.2002)** **EP**
- (71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **PETERS, Ralph, H.** [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (81) Designated States (national): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.**
- (84) Designated States (regional): **ARIPO** patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), **Eurasian** patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), **European** patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), **OAPI** patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: **LIGHTING UNIT**

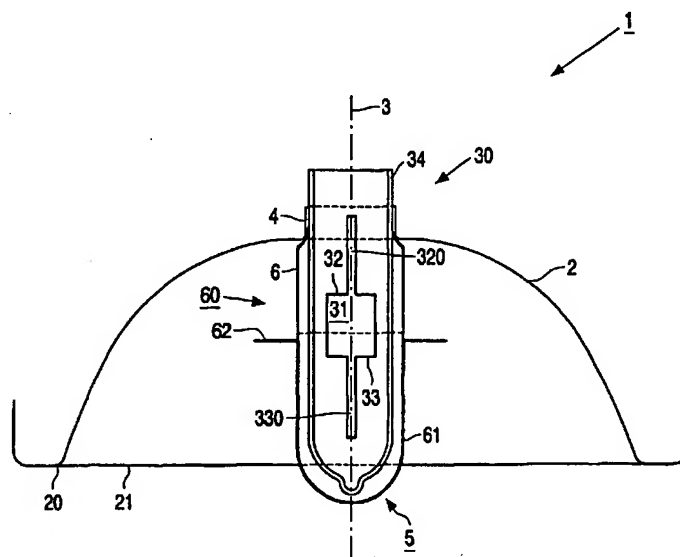

(57) Abstract: The invention relates to a lighting unit (1) having a concave reflector (2) with an axis of symmetry (3) and a light emission window (21) bounded by a circumferential edge (20) transverse to the axis, an elongate light source (30) extending substantially along the axis of symmetry (3), which light source (30) is accommodated in a holder (4) opposite the light emission window (21), and an axially positioned cap (5), which cap partly surrounds the light source (30) and forms an optical screening means to intercept unreflected light rays. According to the invention, the cap (5) forms part of a sleeve (60) surrounding the light source (30).

WO 03/087663 A1